





IVORY - PLAIN



TERACOTTA - PLAIN



IVORY - DOTS




TERACOTTA - DOTS




IVORY - ARCK



TERACOTTA - ARCK



IVORY - SQUARE



TERACOTTA - SQUARE




IVORY - STONE



TERACOTTA - STONE




IVORY - PERAMID



TERACOTTA - PERAMID



IVORY - STEP




TERACOTTA - STEP




IVORY - WINGS



TERACOTTA - WINGS




IVORY - CHECKERS



TERACOTTA - CHECKERS




IVORY - TABS



TERACOTTA - TABS




IVORY - ARROW



TERACOTTA - ARROW




IVORY - DIAMOND



TERACOTTA - DIAMOND




IVORY - STARS



TERACOTTA - STARS



IVORY - SPOTS




TERACOTTA - SPOTS



IVORY - WAVE



TERACOTTA - WAVE

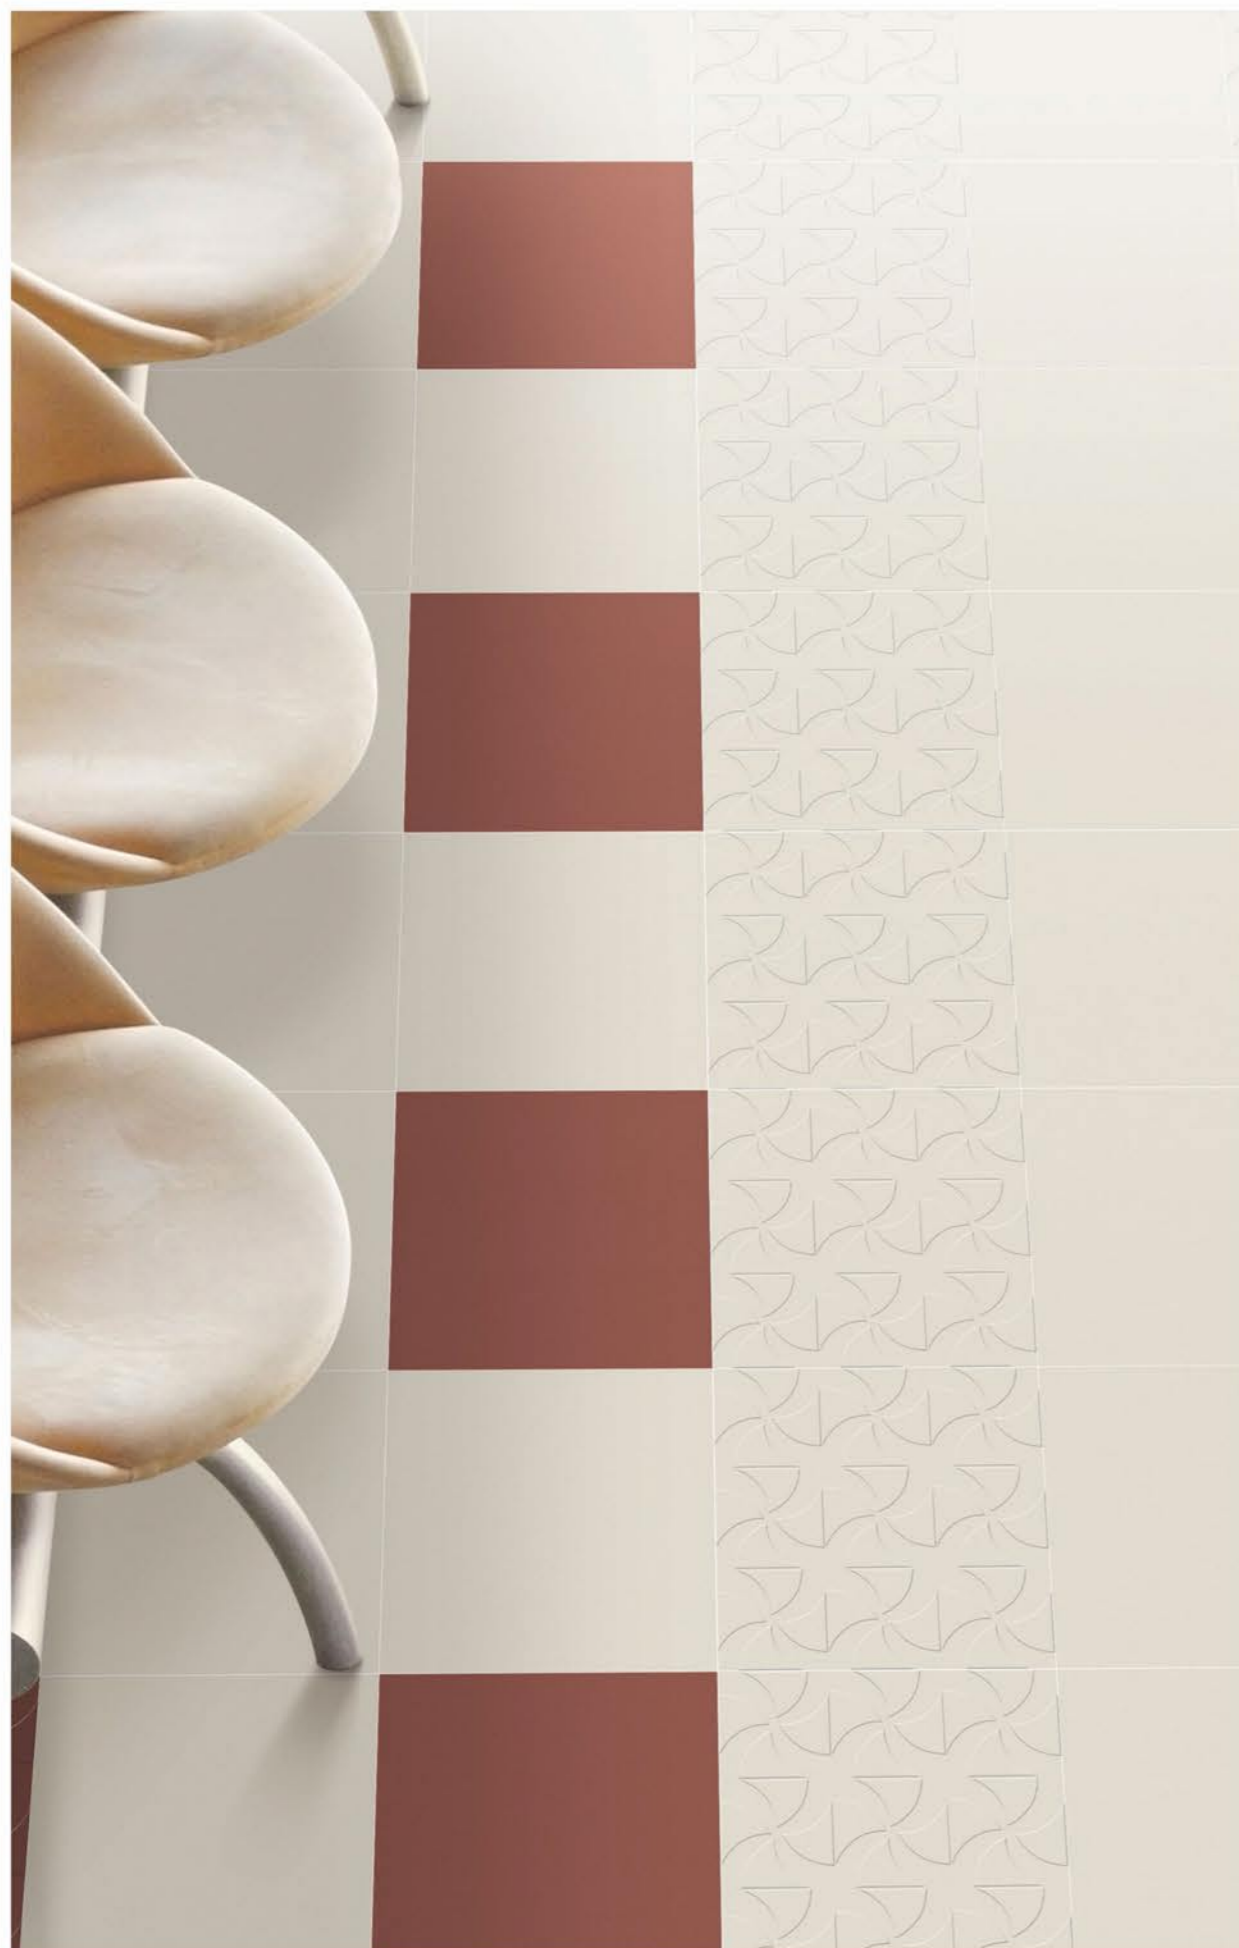

Technical Specification of VITRIFIED TILES

No.	Properties	International Standards	Vitrified Tiles Value	Method of Testing
1	Deviation in length	+/- 0.6%	+/- 0.1%	EN 98
2	Deviation in thickness	+/- 5%	+/- 5.0%	EN 98
3	Straight of sides	+/- 0.5%	+/- 0.1%	EN 98
4	Rectangularity	+/- 0.6%	+/- 0.2%	EN 98
5	Surface Flatness	+/- 0.5%	+/- 0.2%	EN 98
6	Water Absorption	< 0.5%	< 0.05%	EN 99
7	Moh's Hardness	> 6	> 8	EN 101
8	Flexural Strength	>27 N/mm ²	> 44 N/mm ²	EN 100
9	Abrasion Resistance	<204/mm ³	<144mm ³	EN 102
10	Skid Resistance	> 0.4	> 0.6	ASTMC -1028
11	Breaking Strength	1113 N	2200 N	ASTMC- 648
12	Density (gm/cc)	>2	>2.4	DIN 51082
13	Frost Proof	Frost Proof	Frost Proof	EN 202
14	Chemical Resistance	No Damage	No Damage	En 106
15	Thermal Shock Resistance	No Damage	No Damage	EN 104
16	Color Resistance	No Damage	No Damage	DIN 51094
17	Thermal Expansion	<9x10 ⁻⁶	<6x10 ⁻⁶	EN 103
18	Stain Resistance	Resistance	Resistance	ISO 10545-14
19	Moisture Resistance	NILL	NILL	ISO 10545-10
20	Glossiness	-	Min 60%	Glossmeter

Note : * Colour shown in this catalogue may vary with the original tile.

TECHNICAL SPECIFICATION



Packing Details of HEAVY DUTY / DIGITAL VITRIFIED PARKING TILES

Size	No. of Tiles per Box
400x400mm	5 Pcs.
Coverage Area per Box	Weight
0.8 Sq. Mtr. / 8.60 Sq. Ft.	20.5 Kgs (Approx) 12mm

Packing Details of HEAVY DUTY / DIGITAL VITRIFIED PARKING TILES

Size	No. of Tiles per Box
400x400mm	5 Pcs.
Coverage Area per Box	Weight
0.8 Sq. Mtr. / 8.60 Sq. Ft.	28 Kgs (Approx) 16mm

Technical Specifications of DIGITAL VITRIFIED PARKING TILES

PROPERTIES (Industrial Tile)	I.S.-4457	Value 10MM
Deviation in Length	±2.5%	±0.1%
Deviation in Thickness	±2.5%	±1.0%
Wedging	±1.0%	±0.2%
Surface flatness	±1.5%	±0.2%
Water Absorption	< 2.0%	< 0.5%
Mohs Hardness	-	8
Flexural strength	>20N/mm ²	>45N/mm ²
Abrasion Resistance	< 204mm ² (EN 176)	<144 mm ²
Thermal Expansion	No Damage	No Damage
Thermal Shock Resistance	9x10 ⁻⁶ (EN 176)	< 6 x 10 ⁻⁶
Resistance to Acid (wt. loss)	< 1.5%	<0.4%
Skid Resistance (friction coefficient)	>0.4(EN 176)	>0.6
Breaking Strength		400 Kg/cm ²
Stain Resistance	Resistance (EN 176)	Resistant
Moisture expansion	Nil (EN 176)	Nil

Packing Details of DIGITAL VITRIFIED PARKING TILES

Size	No. of Tiles per Box	Thickness
300x300mm	8 Pcs.	10mm (Approx)
Coverage Area per Box	Weight	
0.72 Sq. Mtr. / 7.74 Sq. Ft.	14.8 Kgs (Approx)	

Packing Details of HEAVY DUTY VITRIFIED PARKING TILES

Size	No. of Tiles per Box	Thickness
300x300mm	10 Pcs.	10mm (Approx)
Coverage Area per Box	Weight	
0.90 Sq. Mtr. / 9.68 Sq. Ft.	17.5 Kgs (Approx)	